


Surficial Materials

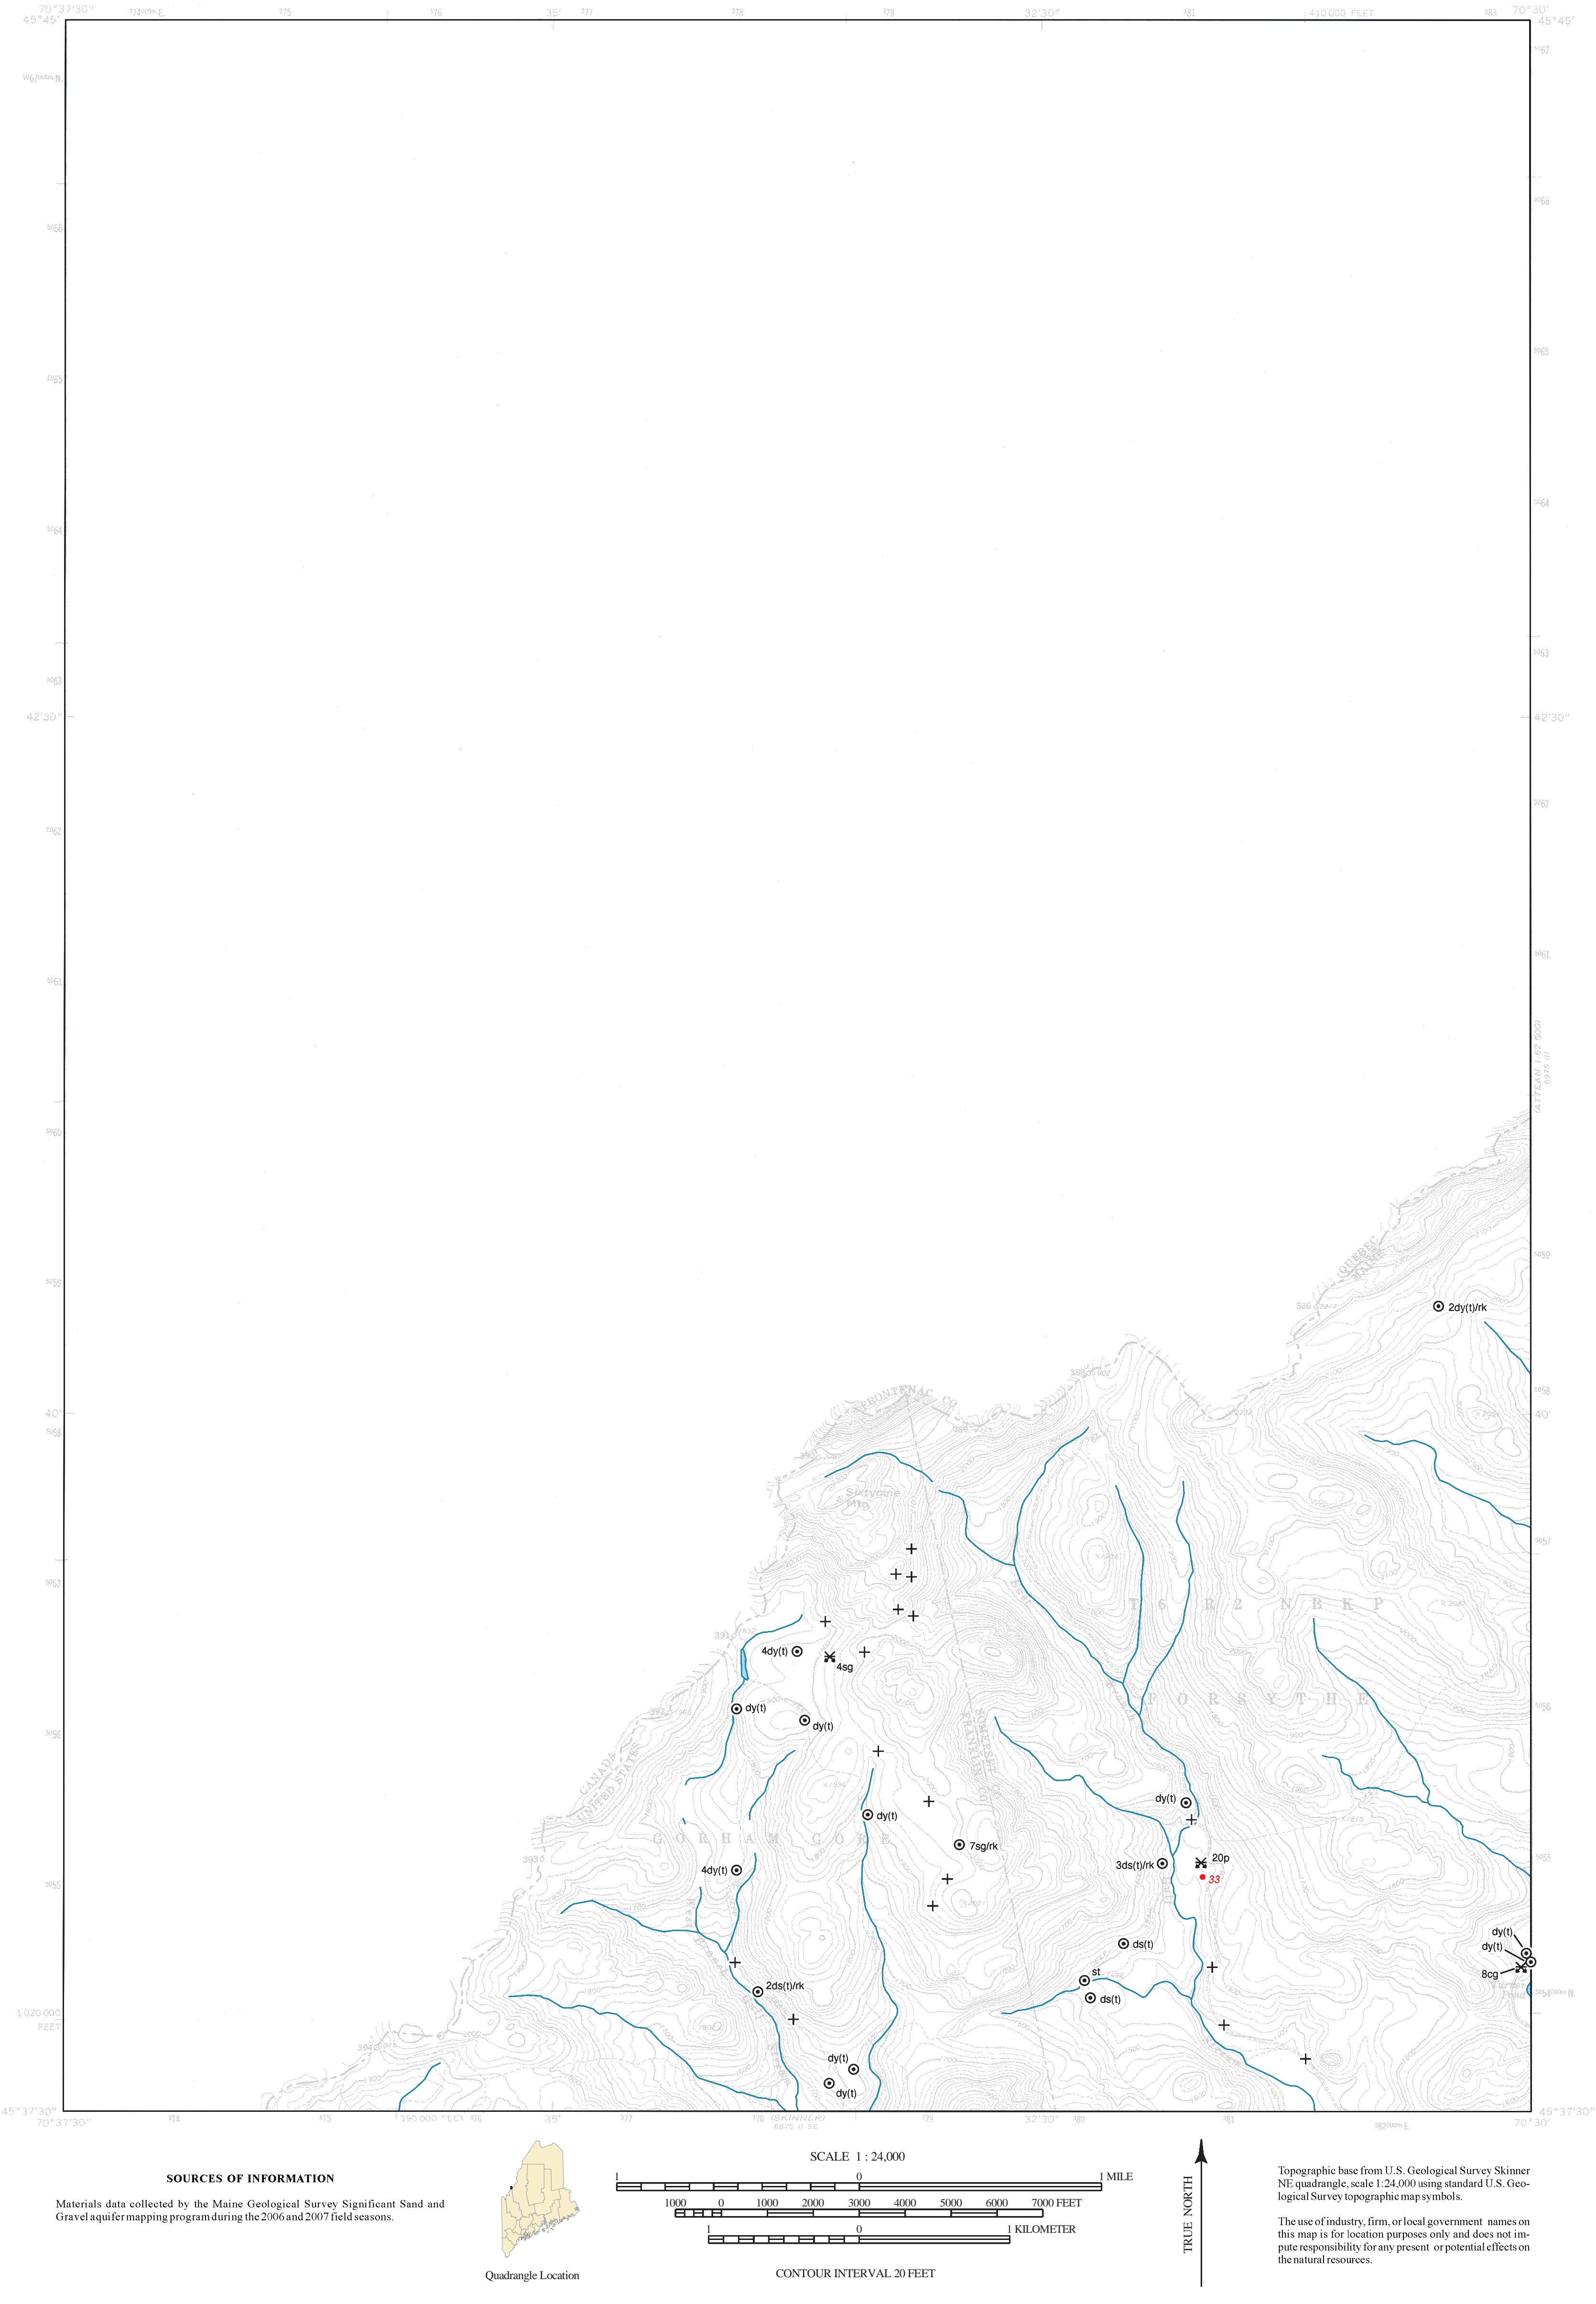

This map shows the textures of surficial sediments in the quadrangle, independent of interpretations regarding their origin. For example, poorly sorted sediments deposited directly from glacial ice are shown here as "diamiction," although they may be genetically classified as "till."	
The symbols listed below indicate materials observed in borrow pits and other surface exposures, as well as subsurface data from various sources. Where more than one textural class is present, materials are separated by commas and listed in decreasing order of abundance (e.g., s, st, cy). Individual materials may occur in distinct layers, or they may be mixed. Hyphens show the ranges of particle sizes present where their relative abundances are uncertain (e.g., st-c). Slash marks indicate superposition of materials. Numbers are observed thicknesses in feet (e.g., 10s/3cy) and in many cases do not indicate the thickness of surficial materials that may exist at greater depths. "12" indicates a significant stratigraphic sequence of interbedded materials. Not all symbols will necessarily be found on the map.	
GRAVEL	g Undifferentiated gravel, used as a general term. Can be subdivided by size as follows: b Boulder gravel >256 mm (10") c Cobble gravel 64-256 mm (2.5-10") p Pebble gravel 2-64 mm (0.1-2.5")
MIXED UNITS	gs Gravelly sand (this is a special case for sand with lesser amounts of intermixed gravel, i.e. pebbly sand, cobbly sand, or bouldery sand) sg Sand and gravel (used only to describe slumped face or other site where relative abundances of sand vs. gravel are unknown).
SAND	s Undifferentiated sand, used as a general term. Can be subdivided by size as follows: vcs Very coarse sand (1-2 mm) cs Coarse sand (0.5-1 mm) ms Medium sand (0.25-0.5 mm) fs Fine sand (0.125-0.25 mm) vfs Very fine sand (0.0625-0.125 mm)
SILT	st Silt (<0.002-0.0625 mm)
CLAY	cy Clay (<0.002 mm)

DIAMICTON	d Undifferentiated diamiction (poorly-sorted sediment in which particle sizes may range from clay to boulders). Used as a general term or subdivided as follows: dg Gravelly-matrix diamiction ds Sandy-matrix diamiction dt Silty-matrix diamiction dy Clayey-matrix diamiction Note: Diamictions of glacial origin may be classified as one of the following varieties of till (shown on the map in parentheses): t Till, undifferentiated. Usually of late Wisconsinan age (deposited by the last glacial ice sheet). ta Ablation till. Deposited during retreat of the late Wisconsinan ice sheet. Typically sandy, stony, and not very compact. tl Lodgment till. Inferred to have been deposited at the base of the late Wisconsinan ice sheet. Usually very compact. tf Flowtill. Deposited by slumping adjacent to glacial ice. T Variably weathered till (usually a lodgment facies) of inferred pre-late Wisconsinan age.
ORGANIC MATERIALS	og Organic-rich sediment (can be any organic material, including forest litter, wood, shells, etc.) pt Peat (reserved for actual fibrous peat)
OTHER MATERIALS	af Artificial fill (e.g. road fills, building sites, dumps) bd Scattered boulders; interpreted as till where followed by (t) rk Bedrock (observed in pit floor, boring, or natural exposure) rs Rottenstone, disintegrated or weathered bedrock, saprolite, u Unknown (material unidentified) R Refusal (in test boring or well) (f) Fossiliferous (used to indicate fossiliferous units within a sequence).

8s-b	Materials data from shovel hole, hand-sauger hole, natural exposure, or excavation (other than borrow pit).
56	Depth to bedrock from well (≥ is used to indicate minimum depth to bedrock), in feet below land surface
•	Bedrock well
⊙	Drilled overburden well
■	Dug well
↓	Driven point
20fs,st	Observation well with materials data
10gs/rk	Test boring with materials data
× s-b	Borrow pit, recently active at time of mapping, with materials data.
× s-p	Borrow pit, evidently abandoned or in long disuse at time of mapping, with materials data where noted in remaining exposures. This symbol also indicates pits that have been reclaimed and no longer exist, but their former locations are evident from earlier reconnaissance work, air photos, or county soils maps published by the U. S. Department of Agriculture.
×	Quarry
9	Location of site for which a data sheet is on file at the Maine Geological Survey.
• 56	Depth to bedrock from seismic line, in feet below land surface
+	Bedrock outcrop

OTHER SOURCES OF INFORMATION

- Caldwell, D. W. and Hanson, L. S., 1976, Reconnaissance surficial geology of the Skinner 15' quadrangle, Maine: Maine Geological Survey, Open-File Map 76-9.
- Johnston, R. A. (compiler), 2007, Significant sand and gravel aquifers in the Skinner NE 7.5' quadrangle, Maine: Maine Geological Survey, Open-File Map 07-14.
- Caldwell, D. W., 1974, Surficial materials of the wildlands of northwestern Maine: Maine Geological Survey, Open-File Report 74-13, 32 p.
- Thompson, W. B., and Borns, H. W., Jr., 1985, Surficial geologic map of Maine: Maine Geological Survey, scale 1:500,000.

Skinner NE Quadrangle, Maine


Surficial materials mapping by
Robert A. Johnston

Digital cartography by:
Robert A. Johnston

Robert G. Marvinney
State Geologist

Cartographic design and editing by:
Robert D. Tucker

Funding for the preparation of this map was provided in part by the
Land Use Regulation Commission, Maine Department of Conservation.



Maine Geological Survey

Address: 22 State House Station, Augusta, Maine 04333
Telephone: 207-287-2801 E-mail: mgs@maine.gov
Home page: <http://www.maine.gov/doc/nrimc/nrimc.htm>

Open-File No. 07-13

2007

SURFICIAL MATERIALS

Uses of Materials Maps

Geologic processes such as weathering and erosion break bedrock down into smaller particles of sediment. Sediments such as clay, silt, sand, gravel, and other loose deposits which lie on top of bedrock are grouped together in the general category of "surficial materials." These materials are not soils; they are the deeper earth materials that lie between the soil zone and the underlying bedrock. Soils commonly develop by weathering of the uppermost part of these materials.

Mapping Surficial Materials

When mapping the surficial geology or the extent of sand and gravel aquifers in a quadrangle, a geologist first makes observations about the surficial materials at a network of points throughout the area. These points of observation may be auger holes, road cuts, gravel pits, stream cuts, or other places where sediments are visible. The geologist describes the materials at each location using the size abbreviations shown in the explanation below the map at left. Sedimentary materials range in particle size from clay (<0.002 mm) to boulders (>256 mm or 10"). The observation points are plotted on the quadrangle and the resulting surficial materials map shows what is known about the distribution, thickness, and texture of sediments in the area.


By combining materials data with well and test hole data, seismic studies, other published information, and analysis of aerial photographs, the geologist then interprets the pattern of these materials to create a geologic map.



Till over bedrock: d(t)/rk -- Road cut on Route 17 in Township D, showing thin layer of till overlying glacially eroded bedrock. Dark streaks on the rock face are wet areas.




Clayey silt over sand with pebble-cobble gravel: st,cy/s,p,c -- Borrow pit in Kennebec River valley, Pittston, showing glaciomarine sealloor mud (Presumpscot Formation) overlying sand and gravel deposited in submarine fan at glacier margin.

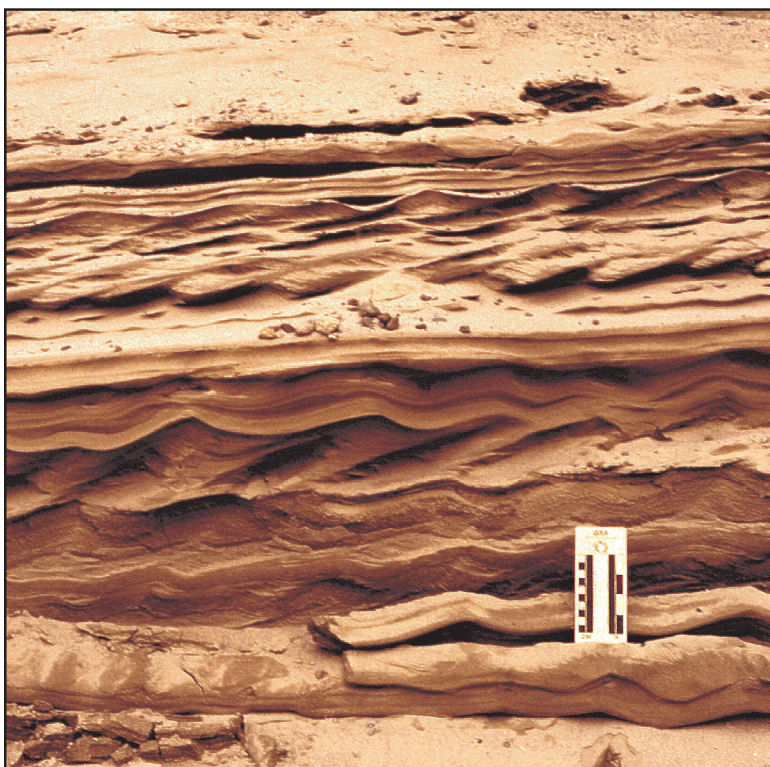

Sand: s -- Close-up of pit face in glaciomarine delta west of Dolby Pond, Millinocket, showing current ripples in sandy delta foreset beds. Scale card is graduated in centimeters and inches.



Pebble to cobble gravel: p-c -- Pit in upper part of glaciomarine delta in Norridgecock, Kennebec River valley, showing massive gravel deposited by meltwater streams flowing across delta top.

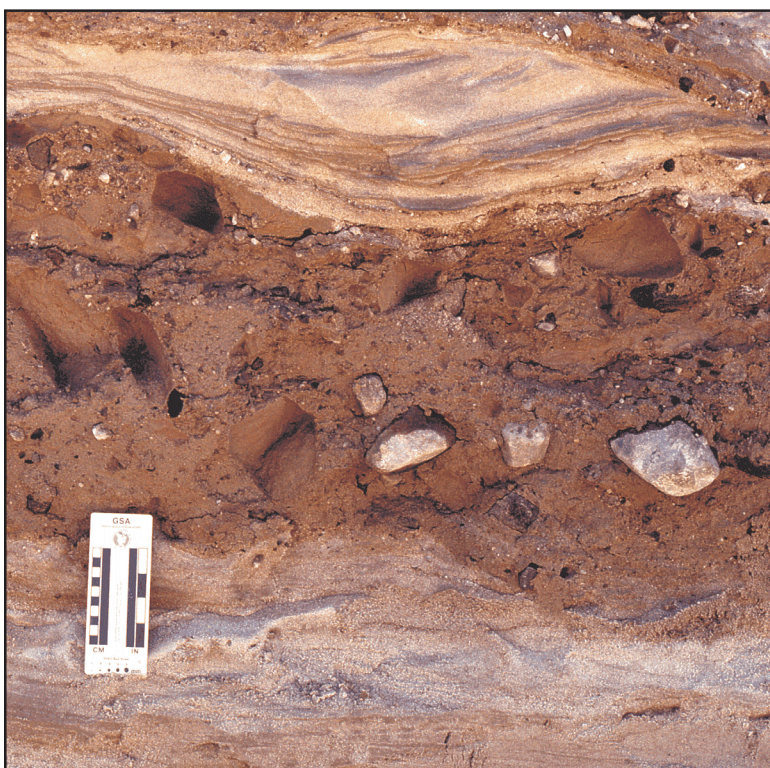


Sand with interbedded flowtill: s ∑ ds(tf) -- Close-up of pit face in an end-moraine, Westbrook, showing part of a stony flowtill lens (center) deposited where glacier margin terminated in the sea.



Till: ds(t) -- Borrow pit near Millinocket, exposing sandy, bouldery till. This stony till commonly occurs in areas of granitic bedrock.



Clay-silt: cy-st -- Coastal bluff in Brunswick, exposing a thick section of well-stratified glaciomarine sealloor mud (Presumpscot Formation).

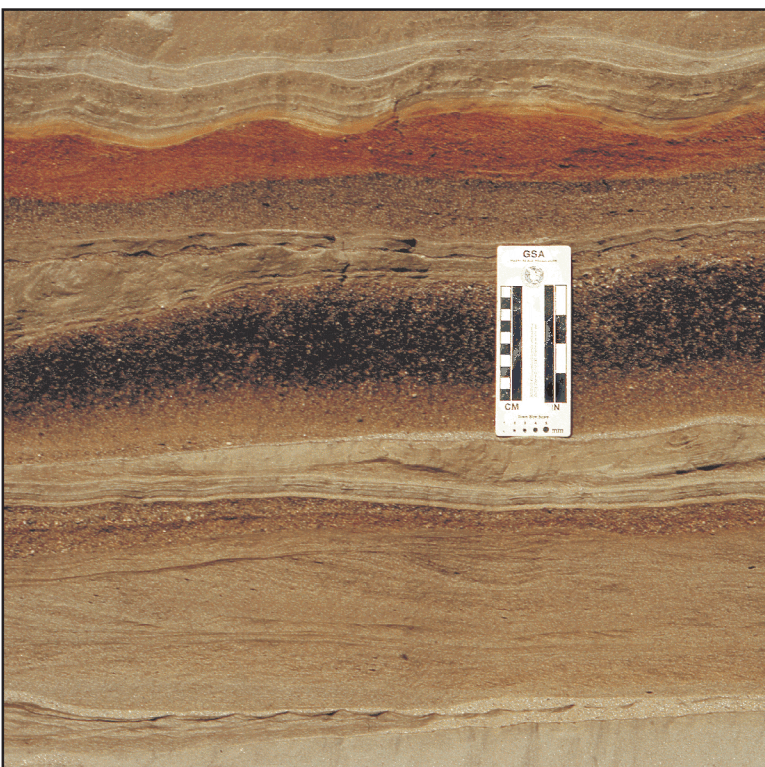

Sand (ranging from very fine-grained to very coarse): vfs-vcs -- Close-up of pit face in well-stratified sand beds deposited in glacial lake at lower end of Bear River valley, Newry.



Pebble to boulder gravel (fossiliferous) over gravelly sand: p-b(f)/gs -- Close-up of pit face in marine nearshore deposit with fossil shells and barnacle-encrusted stones.



Gravel over sand over gravel: p-c/s/p-c -- Close-up of pit face showing intertidal(?) sand unit between pebble-cobble gravel beds in upper part of glaciomarine delta, Columbia Falls.